




*Fire Protection Products, Inc.*

**FIRE PUMP MODEL: JU4H-UFAEF2**

**Heat Exchanger**

**Turbocharged**

**4.5L 4 Cylinder**

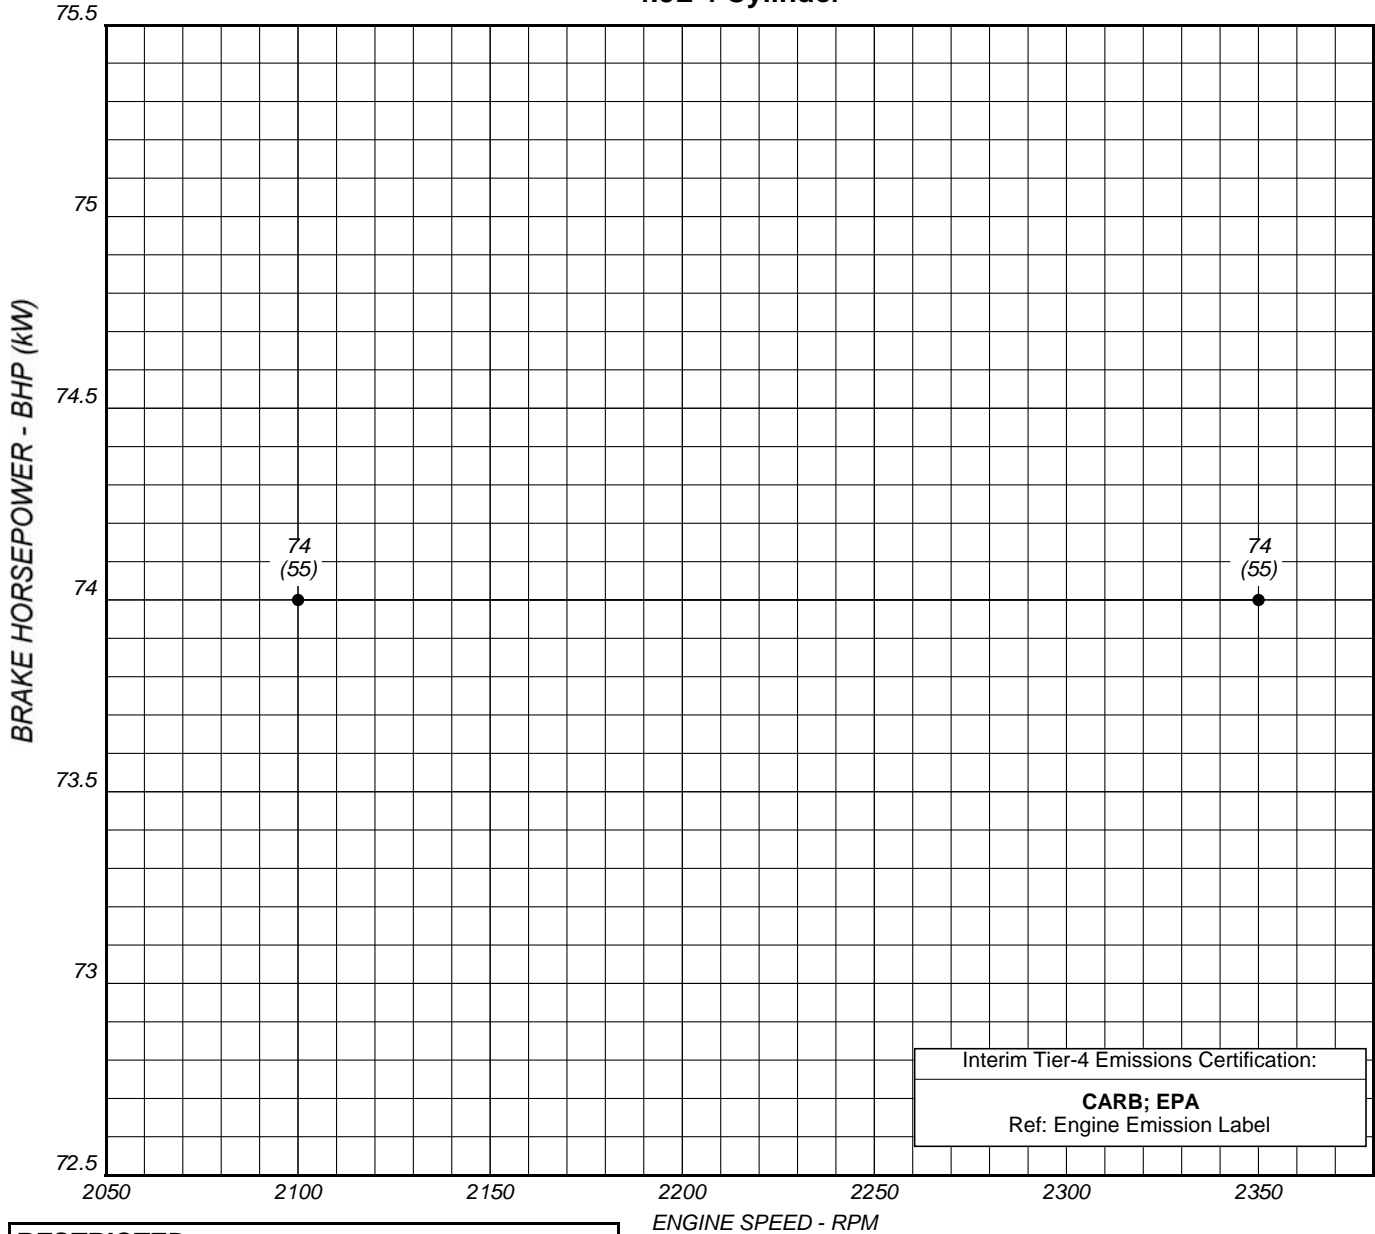

Interim Tier-4 Emissions Certification:  
**CARB; EPA**  
 Ref: Engine Emission Label

**RESTRICTED:**  
 USE ONLY FOR STAND-BY FIRE PUMP APPLICATIONS

**ENGINE PERFORMANCE:**  
 STANDARD CONDITIONS: (SAE J1349, ISO 3046)  
 77°F (25°C) AIR INLET TEMPERATURE  
 29.61 IN. (751.1MM) HG BAROMETRIC PRESSURE  
 #2 DIESEL FUEL (SEE C13940)

*Kevin Kunkler*  
 KEVIN KUNKLER 05NOV10

● — ● NAMEPLATE BHP (MAXIMUM PUMP LOAD)

THIS DRAWING AND THE INFORMATION HEREIN ARE OUR PROPERTY AND MAY BE USED BY OTHER ONLY AS AUTHORIZED BY US. UNPUBLISHED -- ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

CREATED <i>KFE</i>	DATE CREATED 11/05/10
<b>ENGINE MODEL JU4H-UFAEF2</b>	
DRAWING NO. C133641	REV B