




*Fire Protection Products, Inc.*

**FIRE PUMP MODEL: JU4H-UF50**  
**Heat Exchanger**  
**Turbocharged**  
**4.5L 4 Cylinder**

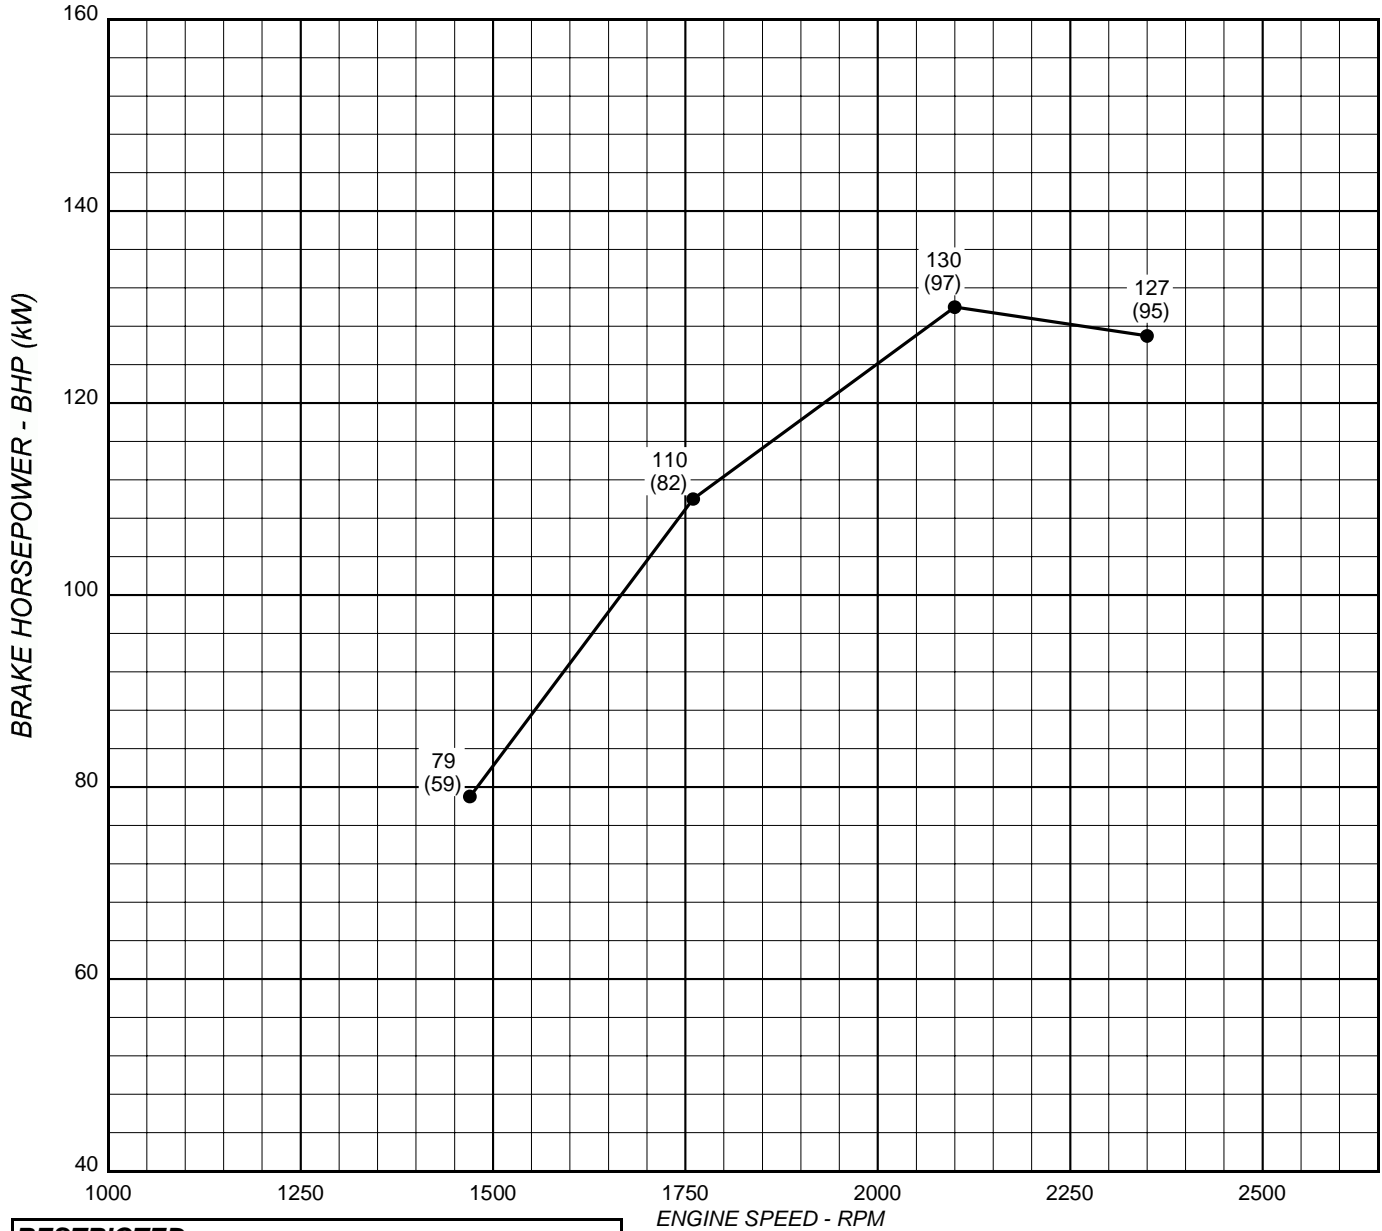

**RESTRICTED:**  
USE ONLY FOR STAND-BY FIRE PUMP APPLICATIONS

**ENGINE PERFORMANCE:**  
STANDARD CONDITIONS: (SAE J1349, ISO 3046)  
77°F (25°C) AIR INLET TEMPERATURE  
29.61 IN. (751.1MM) HG BAROMETRIC PRESSURE  
#2 DIESEL FUEL (SEE C13940)

*Ken Wauligman*  
KEN WAULIGMAN 03JAN05

● — ● NAMEPLATE BHP (MAXIMUM PUMP LOAD)

THIS DRAWING AND THE INFORMATION HEREIN ARE OUR PROPERTY AND MAY BE USED BY OTHER ONLY AS AUTHORIZED BY US. UNPUBLISHED -- ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

CREATED <i>KJK</i>	DATE CREATED 07/28/03
<b>ENGINE MODEL JU4H-UF50</b>	
DRAWING NO. C13477	REV D