


Clarke Tapered Grid Couplings

Type C10

Close Coupled/ Dimensions - Inches

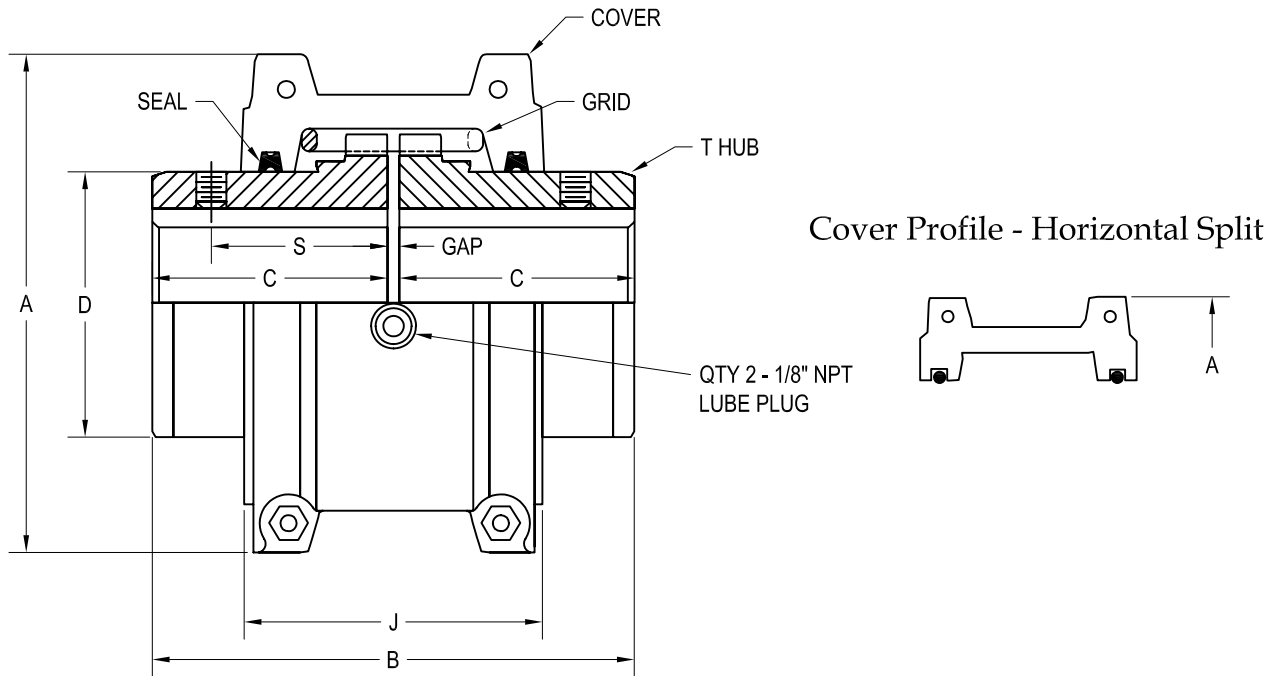

SIZE	MAX TORQUE RATING (ft-lb)	Allow Speed (rpm)	Max Bore	Min Bore	Cplg Wt With No Bore (lb)	Lube Wt (lb)	DIMENSIONS - INCHES						
							A	B	C	D	J	S	Gap
C1040T	184	3,600	1.625	0.500	7.4	0.12	4.50	4.12	2.00	2.25	2.75	1.58	0.13
C1050T	321	3,600	1.875	0.500	12.0	0.15	5.32	4.88	2.38	2.62	3.19	1.76	0.13
C1060T	505	3,600	2.125	0.750	16.0	0.19	5.82	5.12	2.50	3.00	3.68	2.06	0.13
C1070T	732	1,800	2.500	0.750	23.0	0.25	6.25	6.12	3.00	3.44	3.81	2.12	0.13
C1080T	1,511	1,800	3.000	1.062	39.0	0.38	7.50	7.12	3.50	4.12	4.55	2.54	0.13

- * Covers are Cast Aluminum.
- * Clarke Tapered Grid Couplings are only for use with electric motor driven fire pumps.
- * Hub bores are for clearance fit with set screw over keyway.

