




Fire Protection Products, Inc.

FIRE PUMP MODEL: JU4H-UFAD5G

Heat Exchanger Cooled

Turbocharged

4.5L 4 Cylinder

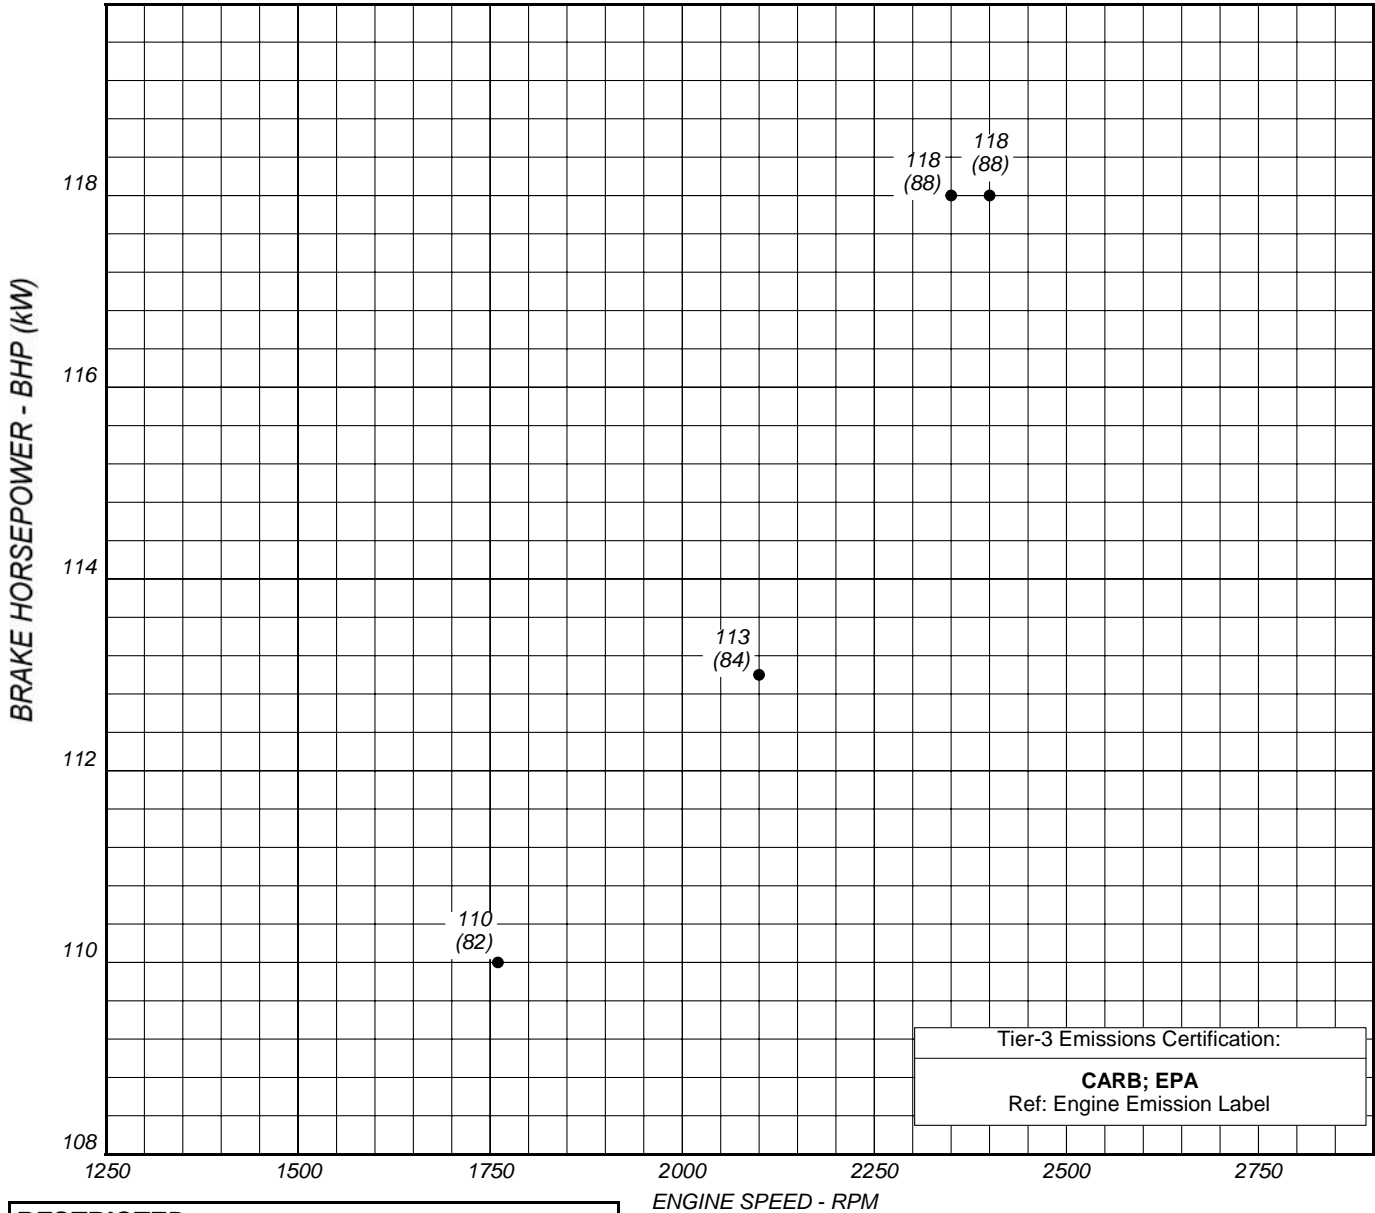

Tier-3 Emissions Certification:

CARB; EPA

Ref: Engine Emission Label

RESTRICTED:

USE ONLY FOR STAND-BY FIRE PUMP APPLICATIONS

ENGINE PERFORMANCE:

STANDARD CONDITIONS: (SAE J1349, ISO 3046)
77°F (25°C) AIR INLET TEMPERATURE
29.61 IN. (751.1MM) HG BAROMETRIC PRESSURE
#2 DIESEL FUEL (SEE C13940)

Kevin Kunkler
KEVIN KUNKLER 14SEP09

● — ● NAMEPLATE BHP (MAXIMUM PUMP LOAD)

THIS DRAWING AND THE INFORMATION HEREIN ARE OUR PROPERTY AND MAY BE USED BY OTHER ONLY AS AUTHORIZED BY US. UNPUBLISHED -- ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

CREATED

KFE

DATE CREATED

09/14/09

ENGINE MODEL JU4H-UFAD5G

DRAWING NO.

C133150

REV

A